
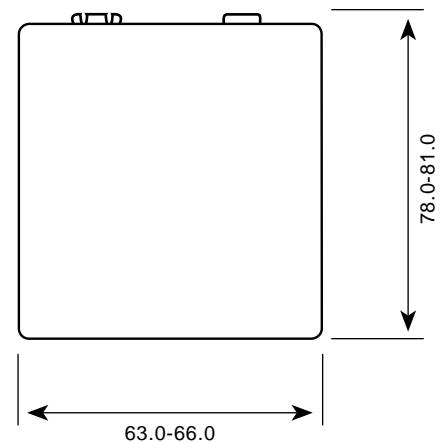


Description	: Layer Built Super Heavy Duty Battery
Chemical System	: Ammonium Chloride
Nominal Voltage	: 9.0 Volts
Nominal Dimensions	: 63 mm x 52 mm x 81 mm
Terminals	: Standard snap fastener stud (+) and socket (-)
Jacket	: Plastic jacket
Applications	: Transistor radios
Warranty Period	: 24 months
Average Weight	: 380g

Model No.: **GP1603S**

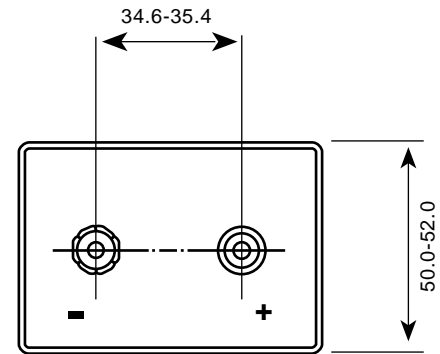


Unit : mm

Cross References:

JIS	IEC	Eveready
6F100	6F100	276

Estimated Service:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
240 Ohms	4 Hrs/ Day	5.4V	13.0 Hrs

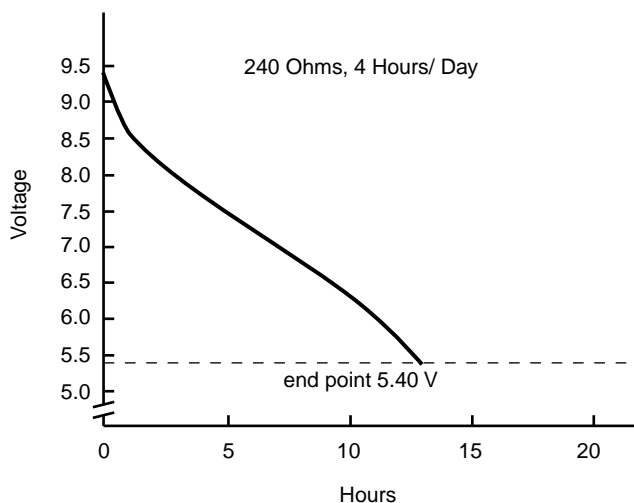


At $20 \pm 2^\circ\text{C}$ and $60 \pm 15\%$ relative humidity, within 30 days of manufacture

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com.hk

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright © GPI International Ltd. - All rights reserved

 Member
Gold Peak Group

03050105082