


# GP Batteries

## Data Sheet


Model No.: GP160SCK

Type	: Rechargeable Nickel Cadmium Cylindrical Cell	
Nominal Dimension (with Sleeve)	: $\varnothing = 23.0\text{mm}$ H = 43.0mm	
Application	: Discharge current 160mA to 8A	
Nominal Voltage	: 1.2V	
Capacity	: Nominal : 1600mAh Minimum : 1600mAh Typical : 1760mAh when discharged at 320mA to 1.0V at 20°C	
Charging Condition	: 160mA for 16 hrs at 20°C	
Fast Charge	: 800mA to 1600mA (0.5C to 1C) with charge termination control. Recommended control parameter : - $\Delta V$ : 10-20mV Timer : 120% nominal input (Secondary)	
Service Life	: >500 cycles (IEC standard)	
Continuous Overcharge	: 160mA maximum current for 1 year No conspicuous deformation and/or leakage	
Weight	: 47.0g	
Internal Resistance	: Average 6m $\Omega$ upon fully charged (Range : 4-8m $\Omega$ ) at 1000Hz	
Max. Charging Voltage	: 1.5V at 160mA charging	
Ambient Temperature Range	Standard Charging	: 0°C to 40°C
	Fast Charging	: 10°C to 40°C
	Discharging	: -20°C to 50°C
	Storage	: -20°C to 35°C
	Storage (1 week)	: -20°C to 60°C


### Fast Charge (Charge Control required)

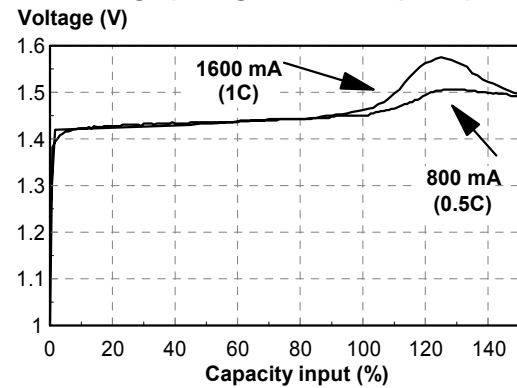

### Low Rate Discharge

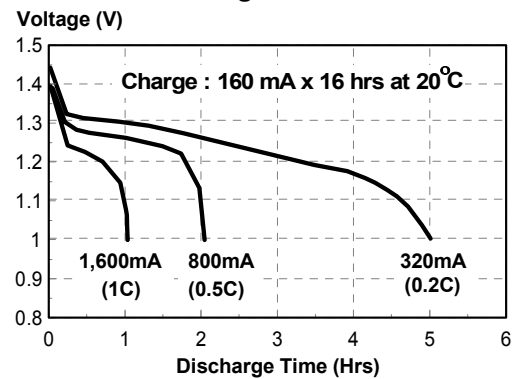

### High Rate Discharge

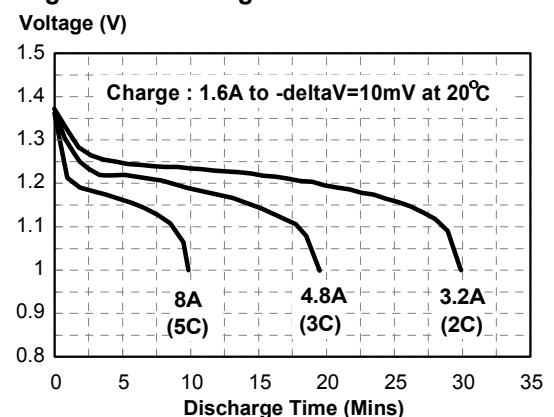

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For application other than those described here, please consult GP Sales and Marketing Office or Distributors.

