


Description	: Lithium Battery
Chemical system	: Lithium Manganese Dioxide
Nominal voltage	: 3 Volts
Nominal capacity	: 3300mAh (Load : 100Ω to 2.0V at 20°C)
Dimensions	: 29.0(L) x 14.5(W) x 52.0(H)mm
Terminals	: Flat, Recessed Negative Terminal
Jacket	: PVC Resin Label
Shelf life	: 5 years
Average weight	: App. 38 grams
Application	: Photo

Model No.: **GPCR-V3**

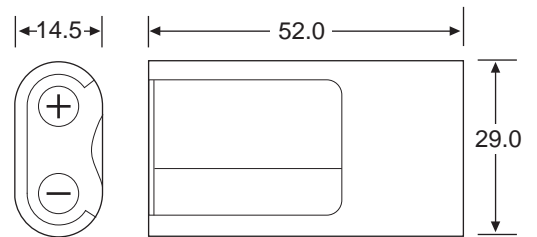


Unit : mm


Cross References:

Energizer	Duracell	Sanyo
ELCRV3	CR-V3	CR-V3


Discharge Characteristics of CR-V3

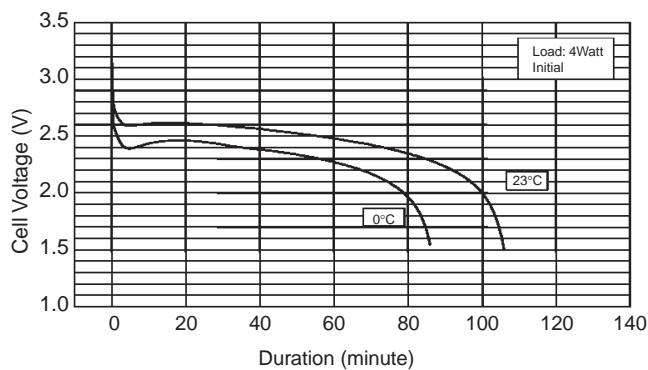


Discharge Characteristics of CR-V3

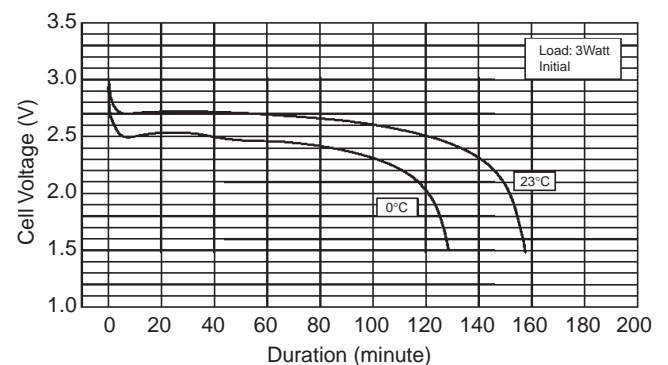

Pulse Discharge Characteristics of CR-V3

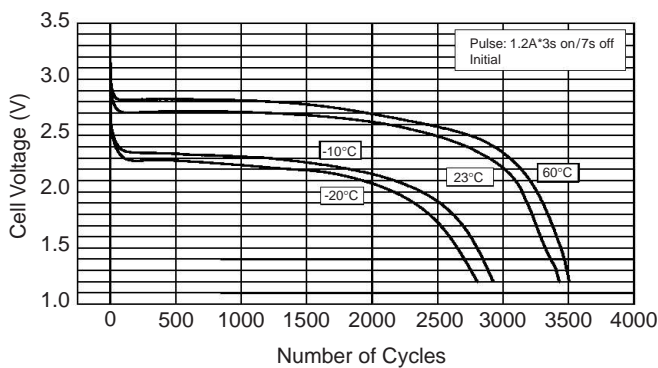

Discharge Characteristics of CR-V3

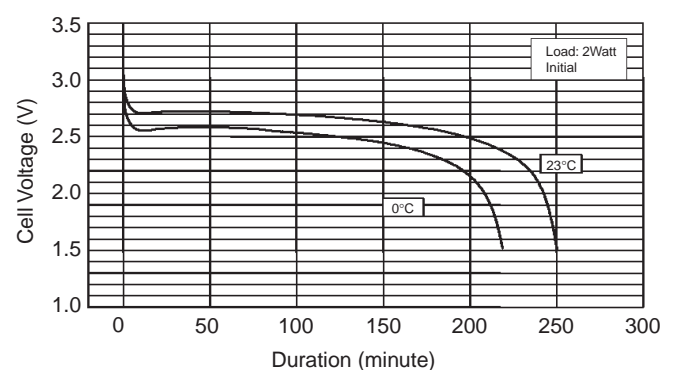

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.