


Soft Pack - DLP983450-A03A+0095

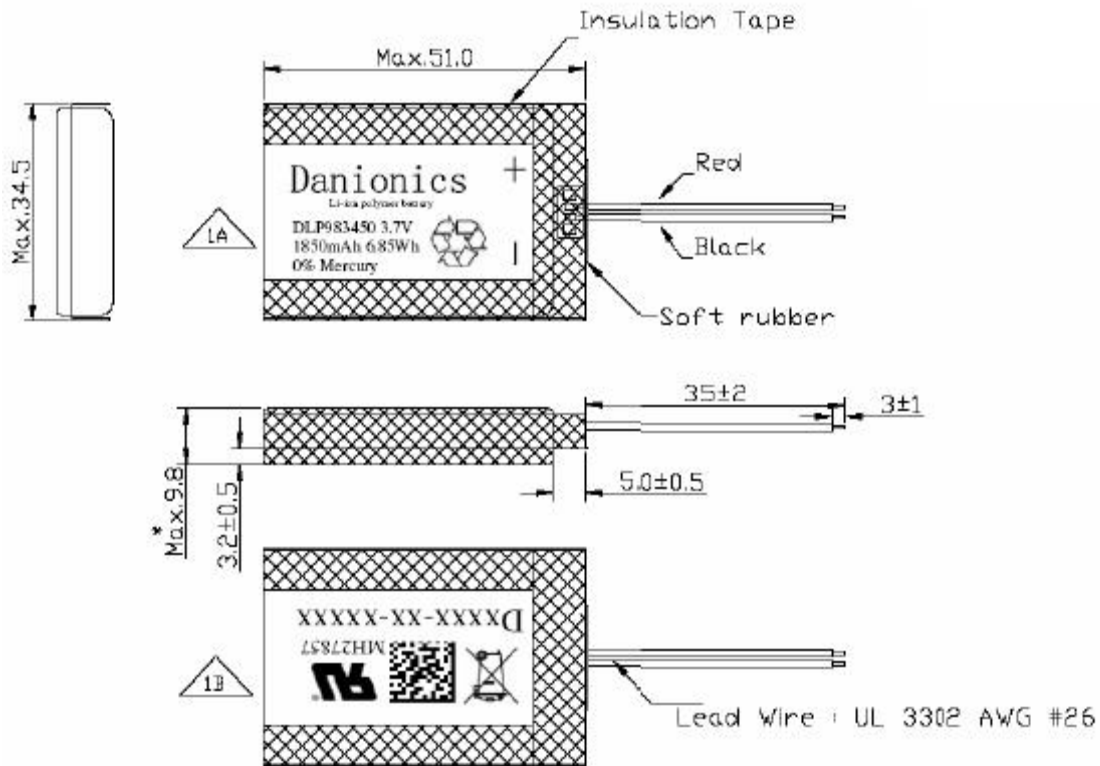

Pack characteristics

Battery Configuration	1S1P
Nominal Voltage	3.7V
Maximum Charge Voltage	4.2V
Discharge Cut-off Voltage	3.0V
Typical Capacity	1850mAh at 0.2C
Charge Method	CC-CV
Standard charge current	925mA
Maximum charging current	1000mA
Operating Temperature	0°C ~ 45°C (Charging) -10°C ~ 60°C (Discharging)
Storage Temperature	-20°C ~ 30°C (1 year) Max. 55°C (1 month)

Protection limits *

Over charge detection voltage	4.28V +/-0.025V
Over discharge detection voltage	2.8V +/- 0.05V
Over discharge current detection	1.4 ~ 3.5A
Short circuit protection	Yes

* For Protection IC under 25°C