



Type	: Rechargeable Nickel Metal Hydride Cylindrical Cell
Nominal Dimension (with Sleeve)	: $\Phi = 10.2\text{mm}$ H = 29.2mm
Applications	: Recommended discharge current 30 to 900mA
Nominal Voltage	: 1.2V
Capacity	: Nominal: 300mAh Minimum: 300mAh Typical: 315mAh When discharged at 30mA to 1.0V at 20°C
Charging Condition	: 30mA for 16 hrs at 20°C
Fast Charge	: 150mA to 300mA (0.5 to 1C) charge termination control recommended control parameters: - ΔV : 0-5mV **DT/dt : 0.8°C/min (0.5 to 0.9C) 0.8 - 1°C/min (1C) **TCO : 45 - 50°C **Timer : 105% nominal input ** for ref. only
Service Life	: >500 cycles (IEC standard)
Continuous Overcharge	: 30mA maximum current for 1 year. No conspicuous deformation and/or leakage
Weight	: 7.5g
Internal Resistance	: Maximum 55m Ω upon fully charged (Range 35 - 75 m Ω) at 1000Hz
Max. Charging Voltage	: 1.5V at 30mA charging
Ambient Temperature Range	: Standard Charge : 0 to 45°C Fast Charging : 10 to 45°C Discharge : -20 to 50°C Storage : -20 to 35°C


Model No.: GP30AAAM

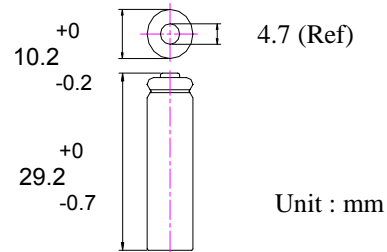


Low Rate Discharge

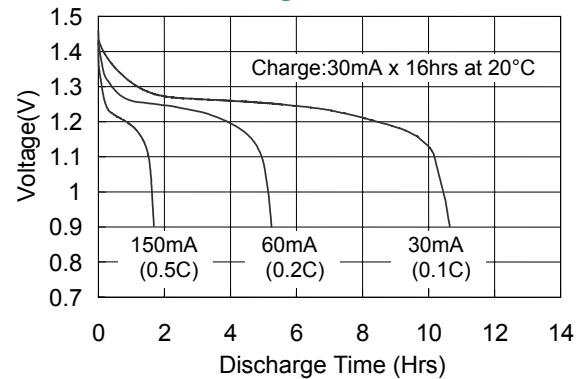

High Rate Discharge

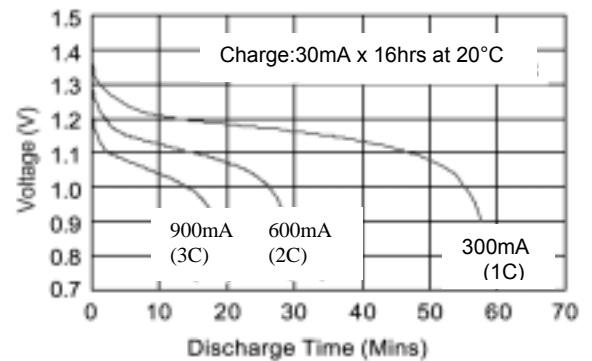

Fast Charge (Charge control required)

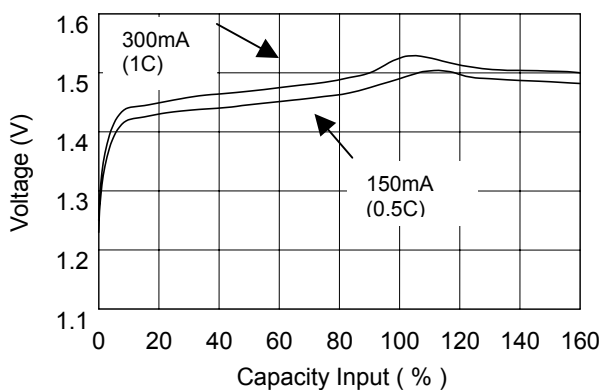

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.