


Model No.: **GP908AU**

NO MERCURY ADDED	
Description	: Mercury & Cadmium Free Alkaline Manganese Battery 6V Lantern Battery
Chemical System	: Alkaline Manganese
Nominal Voltage	: 6.0 Volts
Nominal Dimensions	: 66 mm x 66 mm x 111 mm
Terminals	: Coil Spring
Jacket	: Black Plastic Jacket, Ultrasonic Welded
Applications	: Lanterns, road lamps and other heavy duty lighting devices
Shelf Life	: 36 months
Average Weight	: 910g


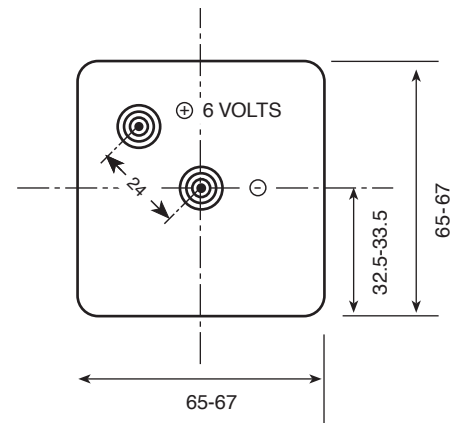


Cross References:

GP	JIS	IEC	Eveready	Duracell
908AU	4LR25X	4LR25	528	MN908

Electrical Service :

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
9.1 Ohms	30 mins/ hr 8 hrs/ day	3.6V	33 hrs
8.2 Ohms	30 mins/ day	3.6V	29 hrs
110 Ohms	12 hrs/ day	3.6V	447 hrs

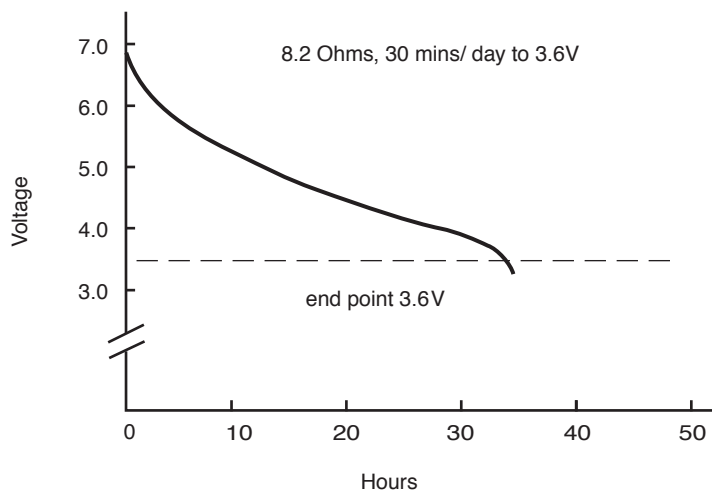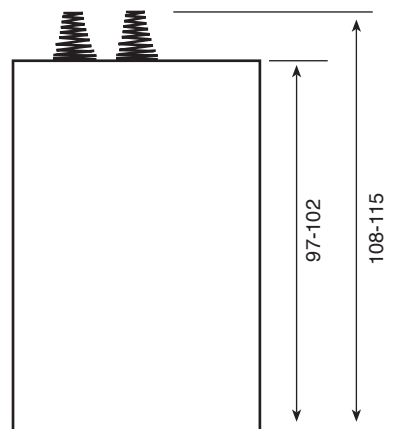

At 20°C within 30 days of manufacture

Unit : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright © GPI International Ltd. - All rights reserved

Member
Gold Peak Group

0511011056