



### Model No.: GP125AAM


<b>Type</b>	: Rechargeable Nickel Metal Hydride Cylindrical Cell
<b>Nominal Dimension (with Sleeve)</b>	: $\Phi = 14.4\text{mm}$ H = 48.2mm
<b>Applications</b>	: Recommended discharge current 125 to 3750 mA
<b>Nominal Voltage</b>	: 1.2V
<b>Capacity</b>	: Nominal: 1250mAh Minimum: 1250mAh Typical: 1300mAh When discharged at 250mA to 1.0V at 20°C
<b>Charging Condition</b>	: 125mA for 16 hrs at 20°C
<b>Fast Charge</b>	: 625mA to 1250mA (0.5 to 1C) charge termination control recommended control parameters: - $\Delta V$ : 0-5mV DT/dt : 0.8°C/min (0.5 to 0.9C) 0.8 - 1°C/min (1C) TCO : 45 - 50°C Timer : 105% nominal input (for ref. only)
<b>Service Life</b>	: >500 cycles (IEC standard) not less than 60% of nominal at 0.1C charged / 0.2C discharged
<b>Continuous Overcharge</b>	: 125mA maximum current for 1 year. No conspicuous deformation and/or leakage
<b>Weight</b>	: 24.0g
<b>Internal Resistance</b>	: Average 23m $\Omega$ upon fully charged (Range 20- 30m $\Omega$ ) at 1000Hz
<b>Max. Charging Voltage</b>	: 1.5V at 125mA charging
<b>Ambient Temperature Range</b>	: Standard Charge : 0 to 45°C Fast Charging : 10 to 45°C Discharge : -20 to 50°C Storage : -20 to 35°C




#### Low Rate Discharge

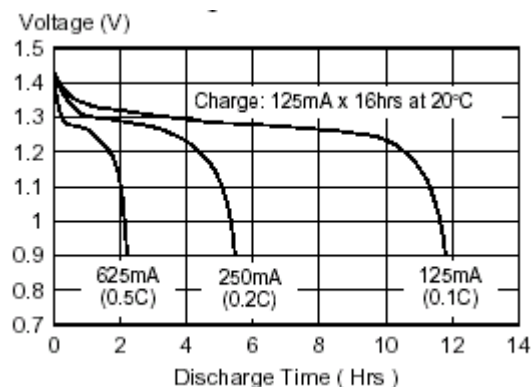

#### Fast Charge (Charge Control Required)

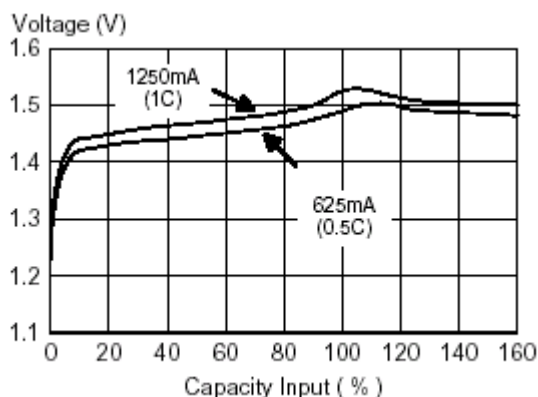

#### High Rate Discharge

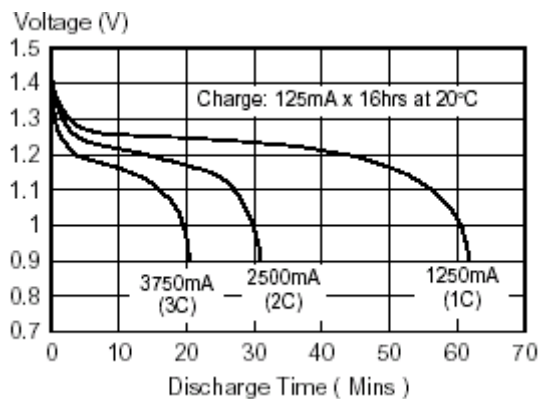

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.