



Type	: Rechargeable Nickel Metal Hydride Cylindrical Cell
Nominal Dimension (with Sleeve)	: $\Phi = 8.6\text{mm}$ H = 29.1mm
Applications	: Recommended discharge current 20 to 600 mA
Nominal Voltage	: 1.2V
Capacity	: Nominal: 200mAh Minimum: 200mAh Typical: 210mAh When discharged at 40mA to 1.0V at 20°C
Charging Condition	: 20mA for 16 hrs at 20°C
Fast Charge	: 100mA to 200mA (0.5 to 1C) charge termination control recommended control parameters: - ΔV : 0-5mV **DT/dt : 0.8°C/min (0.5 to 0.9C) 0.8 - 1°C/min (1C) **TCO : 45 - 50°C **Timer : 105% nominal input **for ref. only
Service Life	: >500 cycles (IEC standard)
Continuous Overcharge	: 20mA maximum current for 1 year. No conspicuous deformation and/or leakage
Weight	: 4.70g
Internal Resistance	: Maximum 500m Ω upon fully charged at 1000Hz
Max. Charging Voltage	: 1.5V at 20mA charging
Ambient Temperature Range	: Standard Charge : 0 to 45°C Fast Charging : 10 to 45°C Discharge : -20 to 50°C Storage : -20 to 35°C


Model No.: **GP20AAA AH**

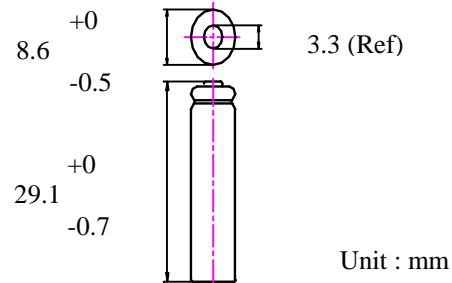


Low Rate Discharge

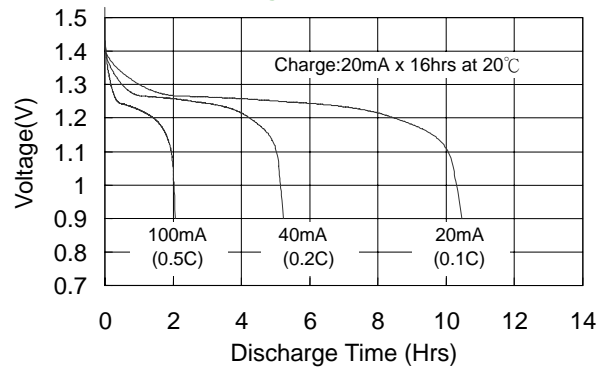

Fast Charge (Charge Control Required)

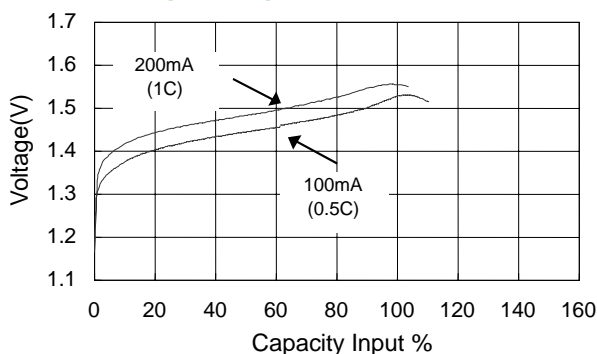

High Rate Discharge

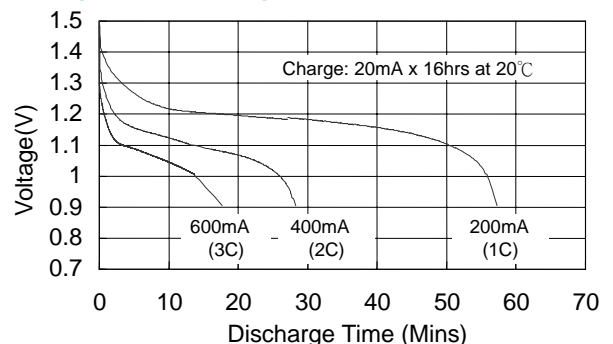

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.